

## The TITAN Firecomm HUC5

Single and stereo for Fire and Rescue

### THE TITAN FIRECOMM HUC5

Should be a permanent item for your fire and rescue communication, Its used for F1SF and F2 helmets.

This comprehensive communication device can be directly connected to a speaker microphone or a PTT using the nexus connection.

The HUC5 comes in a stereo, single or listen-only version for your helmet and critical communication needs.



Part number:  
HUC5-ST-TP-C  
HUC5-ST-TP-S

### Technical data

Loudspeaker specifications		Cable	
Normal size	40mm, 1,5 inch.	Cable length	55cm
Resonant frequency	530 Hz $\pm$ 150 Hz at 1 V	Type	Straight or coiled flame retardant ULV.0
Impedance	8 Ohm $\pm$ 15% at 1 KHz 1 V	Connector	Nexus TP120 connector
Sound pressure level	90 dB/w $\pm$ 3 dB 0.5 w 50 cm ave at 0.8K, 1K, 1.2K, 1.5K Hz	Microphone	
Response	Fo Hz $\sim$ 6 KHz max 10 dB	Generating element	Electret condenser
Input power	Nominal 0.5 W - Handling capacity 1.0 W	Polar response	Noisecanceling at 1KHz - Waterproof
		Sensitivity	-33 to -25dB ref 1 Vms (1KHz and 1PA at 1/4)

## The TITAN Firecomm HUC5

Single and stereo for Fire and Rescue



Part number:  
HUL5 -ST-TP-C  
HUL5 -ST-TP-S




Part number:  
HUL5 -L-TP-C  
HUL5 -L-TP-S  
HUL5-R-TP-C  
HUL5-R-TP-S

Listen only version



Part number:  
HUC5-R-C-TP  
HUC5-L-C-TP

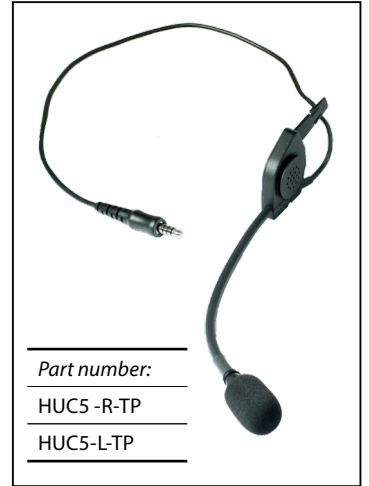

Part number:  
HUC5 -R-TP  
HUC5-L-TP

Single with coiled and straight cable version



Nexus TP120 connector  
to be used for PTT's and  
speaker microphones.



Loudspeakers with a clip  
that fits F1SF and  
F2 helmets.

